



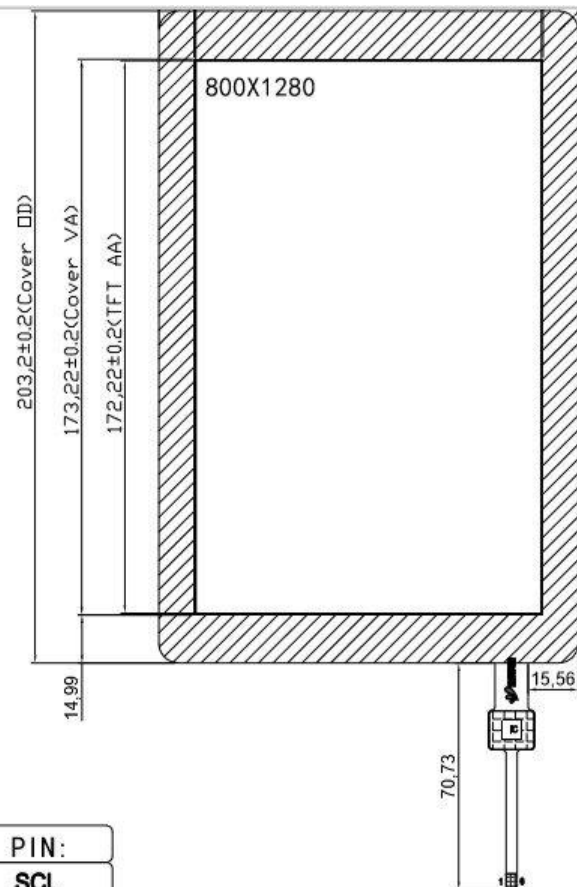

TP	PIN:
1	SCL
2	SDA
3	GND
4	RST
5	INT
6	VCC


Screen printing area: Print Black

Front view

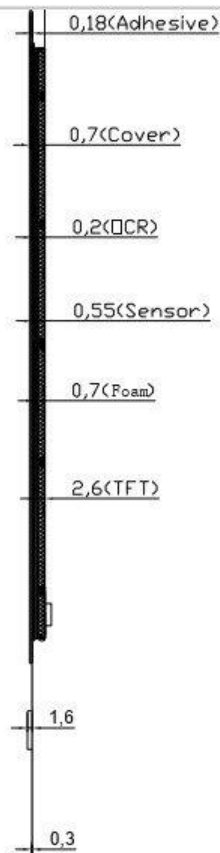

TP Adhesive Area = 0.175mm

Side view

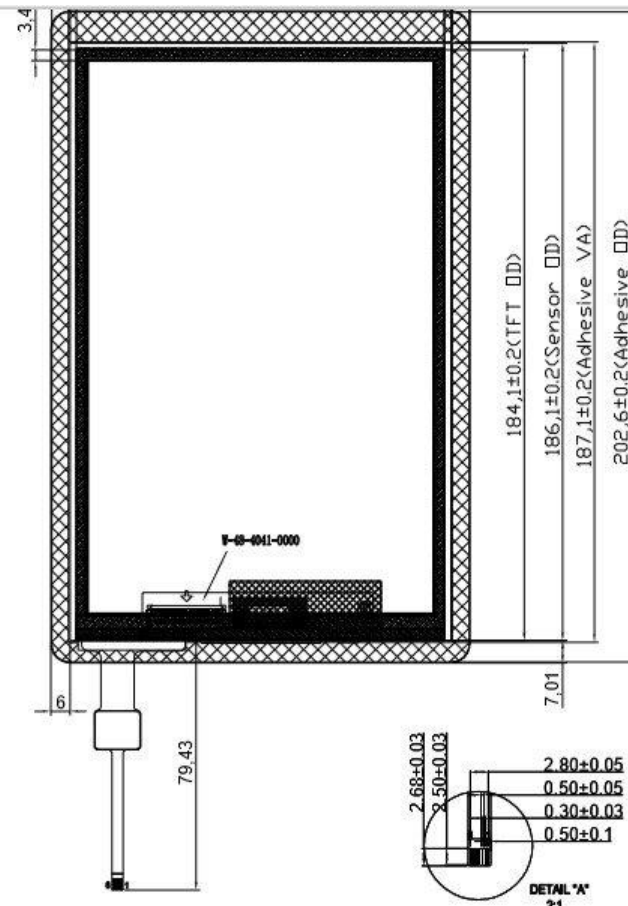

Frame Adhesive Foam Area = 0.7mm

Back view

Technical parameters			
1. Interfaces:	I2C	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC solutions:	GT911	9. surface hardness:	≥6H
4. Impact resistance:	30.0Φ013, SteelBall /132g/Height=45cm/1time	10. Operate :	-20℃~+70℃, ≤85%RH
5.Touch points:	5 points	11. Storage :	-30℃~+80℃, ≤85%RH
6. Power supply:	3.3V	12. Unmarked dimension tolerance as	±0.2

TFT:HX080WXPJ0552A									
1	2	3	4	5	6	7	8	9	10
VCOM	VDDIN	VDDIN	GND	RESET	NC	GND	MIPI-0N	MIPI-0P	GND
11	12	13	14	15	16	17	18	19	20
MIPI-1N	MIPI-1P	GND	MIPI-0LN	MIPI-0LP	GND	MIPI-2N	MIPI-2P	GND	MIPI-3N
21	22	23	24	25	26	27	28	29	30
MIPI-3P	GND	NC	NC	GND	NC	PWM0	NC	VCL	GND
31	32	33	34	35	36	37	38	39	40
LED-	LED-	NC	NC	AVEE	NC	NC	AVDD	LED+	LED+



杭州宏泉科技有限公司
GraHowlet Technology CO., Ltd

Model	HX0801704			view direction		Unit	MM
Version	V2.0	Designer	LUO	Date	2017-11-20	Edition	A1
Customer		Approved	HBZ	Date	2017-11-20	Proportion	1:1